

Reolink Duo Floodlight WiFi

4K Dual-Lens WiFi IP Camera with Floodlights and Panoramic View

- Dual Lens
- Dual-Band WiFi
- 4K 180° Panorama
- Powerful Floodlights

Specifications

Video & Audio	
Image Sensor	1/2.7" CMOS Sensors
Resolution	4608x1728(8 Megapixels) @20fps
Lens	f=3.2mm fixed, F=2.0
Video Format	H.265
Field of View	Horizontal: 180°; Vertical: 60°
Infrared Night Vision	Up to 30 meters (100ft); LED: 14pcs/ 20mil/850nm
Color Night Vision	Floodlight: 40pcs SMD LEDs/15W/ 4200K/1800 Lumens
Frame Rate	2fps - 20fps(Default: 20fps)
Code Rate	Main stream: 3072Kbps - 10240Kbps(Default: 5120Kbps); Sub stream: 256Kbps - 2048Kbps(Default: 1024Kbps)
Audio	Two-way audio
Power Requirements	

DC Power	AC 100V~240V, 50~60Hz; DC 13V 2A
Interface	
Power Port	DC power port
Reset Button	YES
microSD Card Slot	Supports max. 512GB microSD card
Audio In/Out	Built-in microphone and speaker
Wi-Fi	
Wireless Standard	IEEE 802.11 ac/ax/a/b/g/n
Operating Frequency	2.4 GHz/5 GHz
Wireless Security	WPA/WPA2/WPA3
Software	
Browsers Supported	Edge, Chrome, Firefox, Safari
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Protocols & Standards	HTTPS, SSL, TCP/IP, UDP, HTTP, IPv4, UPnP, RTSP, RTMP, ONVIF, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P
User Access	Max. 20 users (1 admin & 19 users); Max. 12 simultaneous streams (2 main & 10 sub streams)
Other Features	
Smart Alarm	Motion detection; Person/vehicle/ animal detection
Record Mode	Motion-triggered recording (Default); Scheduled recording
Time Lapse	YES
Smart Home Compatibility	Google Assistant
Working Environment	
Operating Temperature	-10°C~+55°C (14°F~131°F)
Operating Humidity	10% ~ 90%
Weatherproof	IP67

Mechanical	
Dimensions	195x 103x 56 mm
Weight	1.25kg
Warranty	
Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/


Gallery & Specs



1. Lens
2. IR LED
3. Floodlight
4. Antenna
5. Daylight Sensor
6. Mic



1. microSD Card Slot
2. Reset Button
3. Speaker
4. Mount

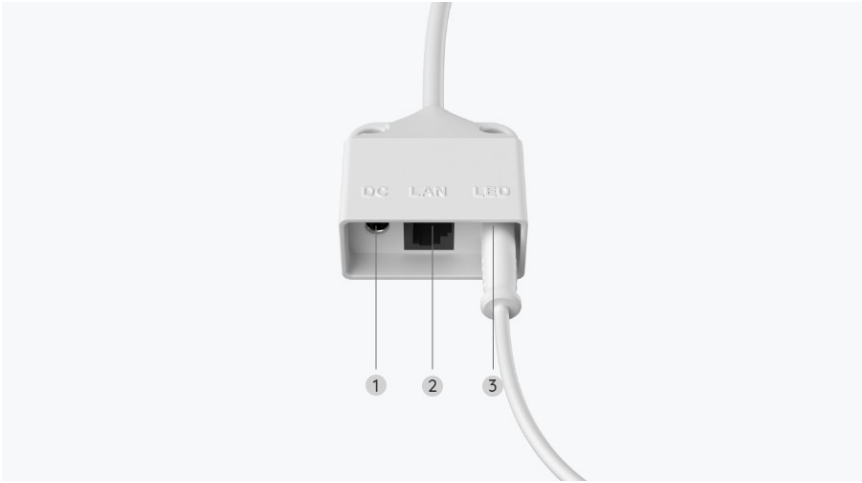

- 1. DC Power Port
- 2. LAN Port
- 3. Charging Port for the Floodlight



You can adjust the floodlights in any direction, even after fixing the camera.

