

## Reolink NVR+TrackMix PoE Bundle

### Smart 4K 8MP UHD PoE Security Kit with Auto-Zoom Tracking

- Dual Lens, View & Tracking
- 4K 8MP Ultra HD
- Power over Ethernet
- 24/7 Recording

## Specifications

Video & Audio	
Image Sensor	1/3"+1/2.8"CMOS Sensor
Video Resolution	Up to 3840 x 2160 (8.0 megapixels) at 25 fps
Lens	f=2.8mm@F=1.6 , f=8mm@F=1.6
Video Format	H.264, H.265
Field of View	Horizontal: 104°-38° Vertical: 60°-21°
Zoom Mode	6X hybrid zoom
Day & Night	IR-cut filter with auto-switching
Infrared Night Vision	Up to 30 meters (100ft) (LED: 2pcs/850nm)
Color Night Vision	Spotlights: 2pcs/6500K/450 lumens
Audio	Two-way audio
Power	
PoE	IEEE 802.3af, 48V active

DC Power	DC 12.0V 2A, <12W
<b>Interface</b>	
Power	DC power port
System	Reset button
Ethernet	One 10M/100Mbps RJ45
Storage	Micro SD card slot (Max. 512GB)
Audio	Built-in microphone and speaker
<b>Pan &amp; Tilt</b>	
Pan & Tilt Range	Pan: 355°, Tilt: 0°~90°
Pan Speed	2.5°-90°/s (Speed can be set)
Tilt Speed	1.5°-60°/s (Speed can be set)
Preset Points	Supports 1 Guard Point & up to 64 Patrol Points
Auto Tracking	YES
<b>Software Features</b>	
Frame Rate	Mainstream: 2fps - 25fps Substream: 4fps - 20fps
Code Rate	Mainstream: 4096Kbps -8192Kbps Substream: 128Kbps -1228Kbps
Browsers Supported	Edge, Chrome, Firefox, Safari
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Smart Alarms	Motion detection; person detection; vehicle detection; animal detection
Recording Modes	Motion-triggered recording (default); scheduled recording; 24/7 recording
Tracking Method	Digital tracking; pan/tilt tracking first; digital tracking first
Protocols & Standards	HTTPS, SSL, TCP/IP, UDP, HTTP, IPv4, UPnP, RTSP, RTMP, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P
Maximal User Access	

	Supports up to 20 users (1 admin account & 19 user accounts); up to 12 simultaneous video streams (10 substreams & 2 mainstreams)
Work with	Google Assistant
<b>Working Environment</b>	
Operating Temperature	-10°C~+55°C (14°F~131°F)
Operating Humidity	10% ~ 90%
Weatherproof	IP65
<b>Size &amp; Weight</b>	
Dimensions	228*147*110mm
Weight	1.21KG
<b>Warranty</b>	
Limited Warranty	2-year limited warranty. For support, visit <a href="https://support.reolink.com/hc/en-us/">https://support.reolink.com/hc/en-us/</a> .

## Gallery & Specs




1. Infrared LED
2. Lens
3. Mic
4. Daylight Sensor
5. Spotlight



- 1. microSD Card Slot
- 2. Reset Button




- 1. USB Port
- 2. Power LED & HDD LED
- 3. Control Panel

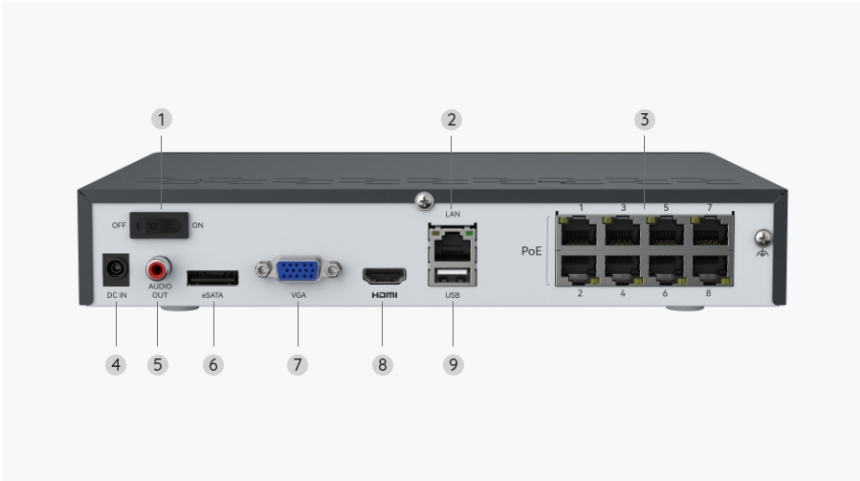

- 1. On/Off Switch
- 2. Network
- 3. RJ45
- 4. Power Input
- 5. Audio Out
- 6. eSATA
- 7. VGA Port
- 8. HDMI Port
- 9. USB Port



- 1. USB Port
- 2. Power LED & HDD LED
- 3. Control Panel

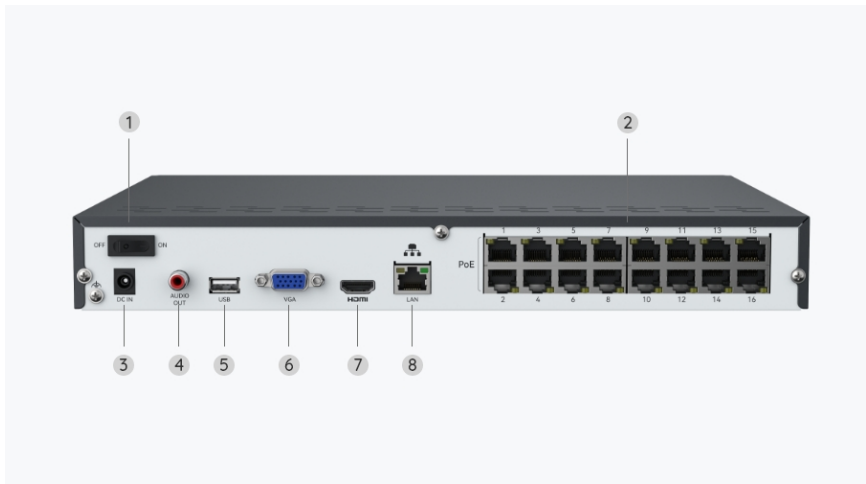

1. On/Off Switch
2. RJ45
3. Power Input
4. Audio Out
5. USB Port
6. VGA Port
7. HDMI Port
8. Network

[www.reolink.com](http://www.reolink.com)