

## RLK16-1200D8-A

### 12MP PoE System for 24/7 Recording

- 12MP Ultra HD
- Person/Vehicle Detection
- 4TB HDD 16-Channel NVR

## Specifications

Hardware	
Hardware	N6MB01
Video/Audio Input	
IP Video Input	Up to 24 IP cameras (max.16 wired cameras)
Audio Input	Cameras with built-in mic
Video/Audio Output	
Video Output	VGA, HDMI
Display Resolution	<ul style="list-style-type: none"> <li>•HDMI: 3840*2160, 1920*1080, 1280*1024, 1280*720, 1024*768;</li> <li>•VGA: 1920*1080, 1280*1024, 1280*720, 1024*768</li> </ul>
Audio Output	1-channel, RCA
Decoding	
Live View/Playback Resolution	7680×2160, 4608×1728, 4512×2512, 4096×3072, 3840×2160, 2560×2560, 2560×1920, 2560×1440, 2048×1536, 2304×1296, 1080p, 720p
Video Format	H.265, H.264
Synchronous Playback	Up to 4 channels

<b>HDD</b>	
SATA	2 x SATA interface (1 x 4TB HDD included)
Capacity	Up to 16TB (max. 8TB capacity for each HDD)
External HDD	No
<b>External Interface</b>	
USB Interface	2 x USB 2.0
Network Interface	<ul style="list-style-type: none"> <li>·1, RJ-45 10/100 Mbps self-adaptive Ethernet interface for LAN/WAN;</li> <li>·16, RJ-45 10/100 Mbps self-adaptive PoE Ethernet interface for IP camera</li> </ul>
<b>PoE</b>	
Max. Power Per Port	25W
Supported Standard	IEEE 802.3 af/at
<b>Network</b>	
Network Protocol	HTTP, TCP/IP, UDP, DHCP, P2P, UPNP, RTSP, SMTP, SSL/TLS, DNS, DDNS, NTP, FTP
Browser Supported	Firefox, Chrome, Edge, Safari
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Max. User Access	20 users (1 admin account & 19 user accounts); up to 12 simultaneous video streams (10 substreams & 2 mainstreams)
<b>General</b>	
Power Supply	DC 48V~54V
Power Consumption	<10W (without HDD & PoE)
Working Environment	<ul style="list-style-type: none"> <li>·Temperature: -10°C~+45°C (14°F~113°F);</li> <li>· Humidity: 10%~90%</li> </ul>
Dimensions	330 x 45 x 285mm
Weight	2.4kg

Limited Warranty

2-year limited warranty. For support, visit <https://support.reolink.com/hc/en-us/>.

## Gallery & Specs



1. Mount
2. Metal Aluminum Case
3. Spotlight
4. IR LEDs
5. High Definition Lens
6. Daylight Sensor
7. Built-In Mic
8. Speaker




Only Manual Rotation



1. Power
2. Reset Button
3. Network
4. Waterproof Lid



1. USB Port
2. Power LED/HDD LED
3. Control Panel

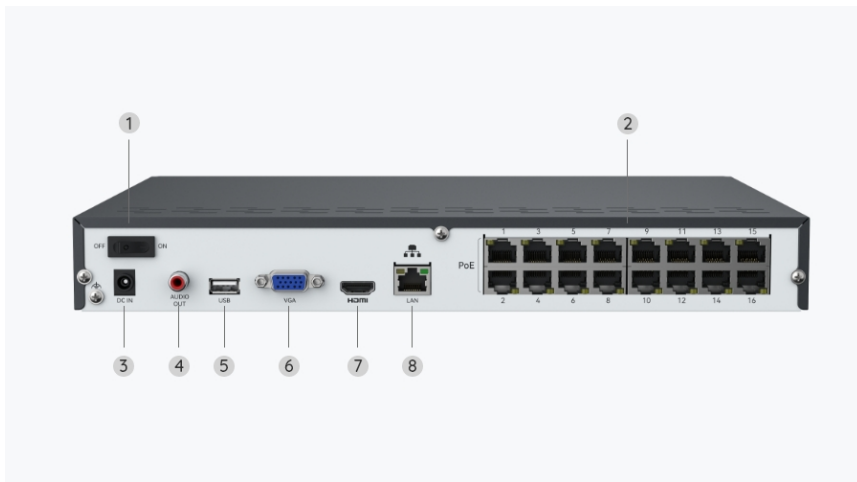

1. On/Off Switch
2. RJ45
3. Power Input
4. Audio Out
5. USB Port
6. VGA Port
7. HDMI Port
8. Network