

## Home Hub with Argus 4 Pro

**4K Wi-Fi 6 centralized management system featuring dual-lens design, colorX night vision, smart detection, weekly insights, etc.**

- 4K UHD 180° Blindspot-free View
- ColorX Night Vision
- Expandable Up to 8 Reolink Cams
- Local Storage, No Monthly Fees
- Non-Stop Solar Power



## Specifications

Device Management	
Camera	Up to 8 cameras
Device Compatibility	All Reolink Wi-Fi & PoE cameras (Battery cameras needs to be upgraded through the firmware support Hub)
Safety Protection	Devices are not accessible individually; must be accessed through Hub
Input/Output	
HDMI	NO
USB	NO
Reset Button	YES
Power	DC 12V/1A
Speaker	Max.115dB

Ethernet	1×10M/100M bit RJ45 Port for WAN
<b>Storage</b>	
SATA	NO
microSD Card Slot	Up to 1TB ×2
Backup Media	NO
Storage Encryption	Protect privacy and prevent theft with AES-128 encryption algorithm
<b>Preview &amp; Playback</b>	
Live View	App, PC Client
Playback	Smart Playback/Quick Events History
<b>Wi-Fi</b>	
Wireless Standard	IEEE 802.11 a/b/g/n/ac/ax (Wi-Fi 6)
Operating Frequency	2.4/5 GHz
Wireless Security	WPA/WPA2/WPA3
<b>System</b>	
Network Protocols	TCP/IP, UDP, DHCP, P2P, UPNP, RTSP, RTMP, SMTP, SSL/TLS, DNS, DDNS, NTP, FTP
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Max. User Access	11 users (1 admin account & 10 shared accounts)
Smart Home	Google Home
<b>Working Environment</b>	
Operating Temperature	-10°C ~ 45°C
Operating Humidity	10% ~ 90%
<b>Mechanical</b>	
Dimensions	95×95×161.8mm
Weight	441g
<b>Warranty</b>	


Limited Warranty

2-year limited warranty. For support, visit <https://support.reolink.com/hc/en-us/>.

## Gallery & Specs



1. Button
2. Indicator Light
3. Vent

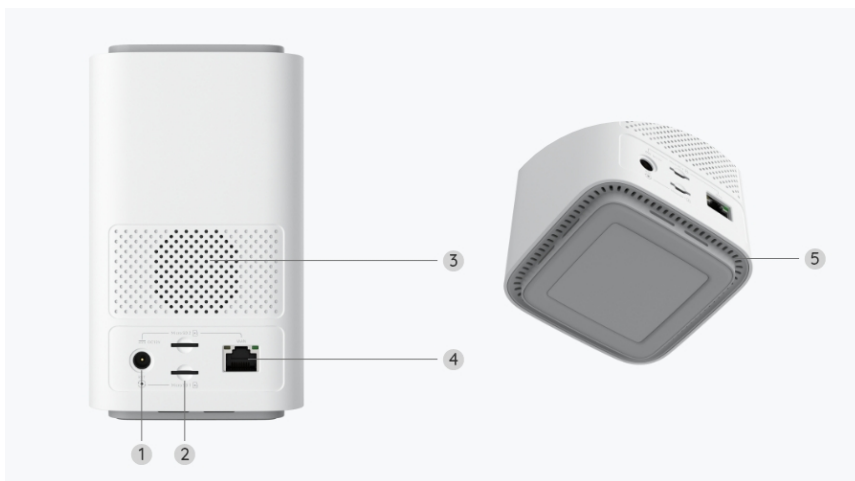

1. DC Input Port
2. microSD Card Slot
3. Speaker
4. LAN Port
5. Vent



1. F/1.0 - 4mm Lens
2. Spotlight
3. CDS
4. Spotlight
5. Status LED
6. Microphone
7. PIR sensor



1. Loudspeakers
2. USB-C connection
3. Reset button
4. MicroSD slot



[www.reolink.com](http://www.reolink.com)